

B620003



- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : AWG20#~12#
- ▶ 适用基板厚度 (Applicable PC board thickness) : —
- ▶ 温度范围 (Temperature range) : -25℃~+85℃
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 10A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute

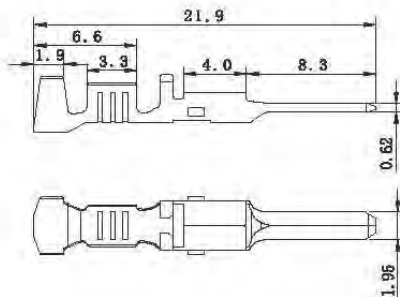
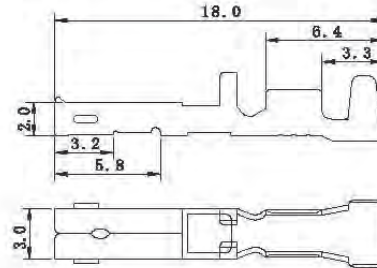
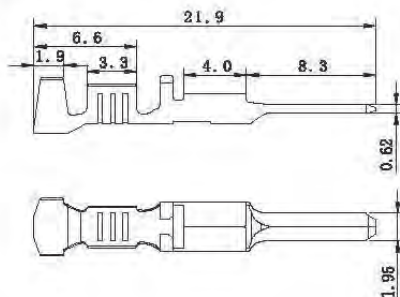
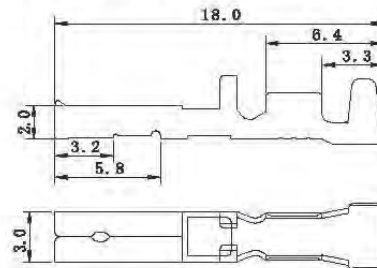
材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	磷青铜 Phosphor bronze	0.3mm	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

TERMINAL

B450003-3-I
35745-0110

B450003-4-I
35746-0110

B450003-3-II
35747-0110

B450003-4-II
35748-0110


HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
1	B730001-1-01 35150-0100 	B730001-2-01 35151-0100

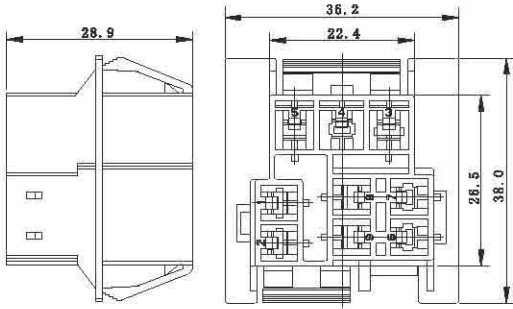
B620003

HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
2	<p> B620003-1-02 35150-0210 </p> <p> B620003-1-02F 35150-0200 </p>	<p> B620003-2-02F 35151-0210 </p>
3	<p> B730001-1-03 35150-0310 </p>	<p> B730001-2-03 35151-0310 </p>
4	<p> B620003-1-04 35150-0410 </p>	<p> B620003-2-04 35151-0410 </p>
6	<p> B730001-1-06 35150-0610 </p>	<p> B730001-2-06 35151-0610 </p>

B620003

HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
9	<div style="display: flex; justify-content: space-around;"> B620003-1-09 35524-0920 </div> 	

HOUSING

B620003-5-01

35150-0190

B620003-5-02

35150-0292

B620003-5-03

35150-0392

